


Installation Instructions

5626060 LED Light Strip

General:

Installation of 60" L.E.D. light strip will require a measuring tape and masking tape. Follow the steps below. The light strip mounts in the recessed area between the bottom of the tailgate and bumper shelf. It can be plugged into a standard 4-pin flat trailer plug. If your vehicle has a 4-pin round trailer plug, a 4-pin round to 4-pin flat adapter can be purchased from an auto part or trailer supply store.

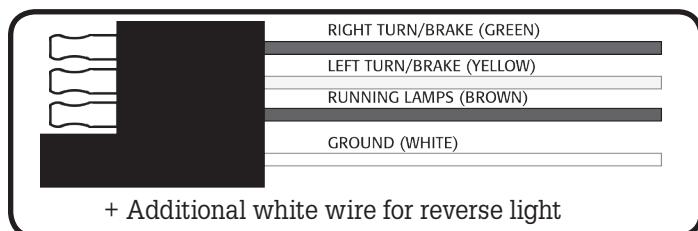

WARNING

Please confirm your vehicle's wiring sequence prior to installing

Installation Notes:

1. Please read all instructions before installing light strip.
2. The following procedure describes a typical installation.
3. Prior to installation check all parts and inspect light strip for damage and/or cracks.
4. Lighting laws vary depending on jurisdiction; check your local laws before installation.
5. Light strip must be installed at 60 degrees F. or higher. If the temperature is lower, a heat gun should be used to ensure proper adhesion.
6. Have light strip professionally installed if you are not familiar with vehicle wiring or installation instruction listed below.

Installation:

1. Important: Thoroughly clean the mounting surface before installation. Use warm soapy water to remove all wax and dirt. Rinse with clean water and dry completely. Clean again using rubbing alcohol. This will remove any remaining dirt/oil. Do not touch surface after cleaning.

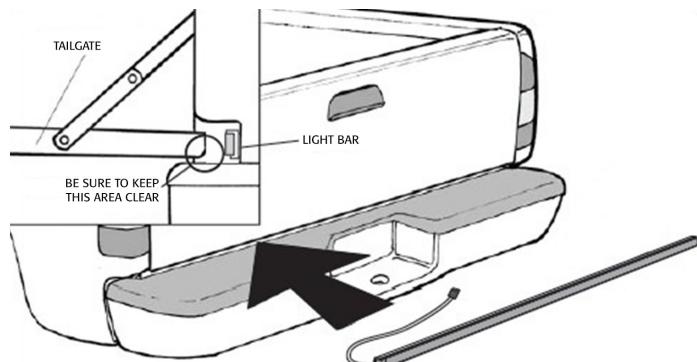


Fig. 1

2. Marking and mounting installation location.

A. Do not remove adhesive tape backing until after the mounting location has been marked using tape.

B. The wire bundle end of the light strip must face the driver's side for the turn signals to work properly.

See Fig. 1

C. Hold the light strip assembly in position so it's equally spaced from top to bottom and left to right. Mark this location with pieces of tape (left, right, and center). The top edge of the tape should line up with the bottom edge of the light strip.

Mounting Assembly:

1. Peel off the adhesive tape backing. Be careful to not contaminate the adhesive with fingerprints or dirt. Lightly attach the light strip along the marked location starting with the center section and then the right and left sides. Make sure bottom edge of light strip is in line with the top edge of tape. ONLY USE LIGHT PRESSURE AT THIS TIME. You may want to adjust the alignment of the light strip later. If the light strip is not straight and level, pull up the adhesive taped areas lightly and reposition.
2. Once the light strip is in the correct position, firmly press along the entire length of the light strip to secure it.
3. Remove location tape strips.

Electrical Hook Up:

1. Plug the connector into the vehicles standard flat 4-pin trailer connector. If your vehicle has a 4-pin round trailer plug, a 4-pin round to 4-pin flat adapter can be purchased from an auto part or trailer supply store.

Reverse Light Connection:

1. Remove the taillight from the taillight housing.
2. Locate the positive wire on the reverse light. Splice the white wire from the light strip to the positive wire on the reverse light. Make sure connection is good. Use electrical tape to seal connection.
3. Reinstall the taillight into the taillight housing.

Testing:

1. Test running, stop, right turn, left turn, reverse, and hazard functions on the light strip and taillights. Do not take vehicle on the road unless all taillight and light strip functions are working properly.
2. If you have issues with the functions of the light strip check in-line 1 amp fuse (on ground wire).
3. You can use a 9 volt battery to test power off of the vehicle. Connect (-) to the ground and (+) to each of the three connectors on the 4-pin trailer plug. This will ensure functionality of the bar.

WARRANTY

Buyers Products Co. warrants all truck/trailer hardware manufactured or distributed by it, to be free from defects in material and workmanship for a period of one year from date of shipment. Parts must be properly installed and used under normal conditions. Any product which has been altered, including modification, misuse, accident or lack of maintenance will not be considered under warranty. Normal wear is excluded. The sole responsibility of Buyers Products Co. under this warranty is limited to repairing or replacing any part or parts which are returned, prepaid, and are found to be defective by Buyers Products Co. Authorization from Buyers Products Co. must be obtained before returning any part. No charges for transportation or labor performed on Buyers' products will be allowed under this warranty.